

金属防折弯电缆接头

经济款

H492系列

金属製の曲げ防止ケーブル接続部
Metal anti-bending cable connector



● 特点 Features


- * 金属防折弯电缆接头，采用带有螺旋形弯曲防护套设计，防止线缆反复过渡折弯，进而降低电缆破裂危险；
- * 耐化学、耐腐蚀、具有高安全性和稳定性的特点；
- * 无卤素和磷，阻燃等级V2，参照UL94标准，UL F1标准耐紫外线，参照DIN EN60529；
- * 金属製の折り曲げ防止ケーブル接続部は、ケーブルが逆になることを防止するために、螺旋形の折り曲げ保護カバー設計を採用しています。復度は曲げて、ケーブルの破裂の危険を下げます；
- * 耐薬品性、耐食性、高い安全性と安定性の特徴を持つ；
- * ハロゲンとリンフリー、難燃性等級V2、ul94基準、ulF1基準耐紫外線、din en60529参照；

- * The metal anti-bending cable connector is designed with spiral bending protection sleeve to prevent the cable from reversing multiple transition bending, thus reducing the risk of cable rupture;
- * Chemical resistance, corrosion resistance, high safety and stability;
- * Halogen and phosphorus free, flame retardant grade V2, refer to UL94 standard, UL F1 standard uv resistance. See DIN EN60529;

● 规格参数 Specifications

型号 Model	H492系列
材质 Material	黄铜镀镍
防折弹簧	不锈钢1.4310/ASTM301/SUS301
夹弹件 The clamping piece	尼龙(UL FILE NO:E240925) 阻燃等级V-2, 参照UL94
密封件 The seals	丁腈橡胶
防护等级 Protection grade	IP68(在夹紧范围内, 并使用O型圈)
环境温度 The environment temperature	-40°C至+100°C
应用特点 Application characteristics	适用于保护线缆进出线防止过渡折弯的金属电缆接头

● 外形图 Dimensions

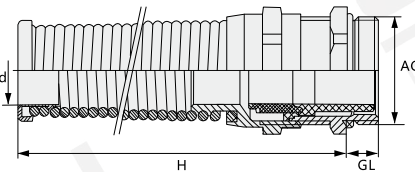

● PG制螺纹选型 PG thread selection

单位: mm

型号 Model	螺纹规格 Thread specification	电缆范围 Cable range	螺纹长度GL Length of thread	本体高度H Body height
H492-P-1	PG7	3-6.5	5	53
H492-P-2		2-5	5	53
H492-P-3		4-8	6	66
H492-P-4	PG9	2-6	6	66
H492-P-5		5-10	6	77
H492-P-6	PG11	3-7	6	77
H492-P-7		6-12	6.5	88
H492-P-8	PG13.5	5-9	6.5	88
H492-P-9		10-14	6.5	98
H492-P-10	PG16	7-12	6.5	98
H492-P-11		13-18	7	111
H492-P-12	PG21	9-16	7	111

型号 Model	扳手直径 Spanner diameter	螺纹外径AG Thread diameter	开孔尺寸 Cut-out	数量/盒 Pcs/Box
H492-P-1	14	12.5	12.5-12.8	50
H492-P-2	14	12.5	12.5-12.8	50
H492-P-3	17	15.2	15.2-15.5	50
H492-P-4	17	15.2	15.2-15.5	50
H492-P-5	20	18.6	18.6-18.9	20
H492-P-6	20	18.6	18.6-18.9	20
H492-P-7	22	20.4	20.4-20.7	20
H492-P-8	22	20.4	20.4-20.7	20
H492-P-9	24	22.5	22.5-22.8	20
H492-P-10	24	22.5	22.5-22.8	20
H492-P-11	30	28.3	28.3-28.6	10
H492-P-12	30	28.3	28.3-28.6	10

ROHS



抗拉力强

密封性高

IP68

询问胜蓝

0755-8886 0059

当日出货

ISO公制螺纹选型 ISO metric thread selection

单位: mm

型号 Model	螺纹规格 Thread specification	电缆范围 Cable range	螺纹长度GL Length of thread	本体高度H Body height	扳手直径 Spanner diameter	螺纹外径AG Thread diameter	开孔尺寸 Cut-out	数量/盒 Pcs/Box
H492-M-1	M12×1.5	3-6.5	5	53	14	12	12-12.3	50
H492-M-2		2-5	5	53	14	12	12-12.3	50
H492-M-3		4-8	6	66	17	12	12-12.3	50
H492-M-4		2-6	6	66	17	12	12-12.3	50
H492-M-5	M14×1.5	4-8	6	66	17	14	14-14.3	50
H492-M-6		2-6	6	66	17	14	14-14.3	50
H492-M-7	M16×1.5	4-8	6	66	17	16	16-16.3	50
H492-M-8		2-6	6	66	17	16	16-16.3	50
H492-M-9		5-10	6	77	20	16	16-16.3	20
H492-M-10		3-7	6	77	20	16	16-16.3	20
H492-M-11	M18×1.5	5-10	6	77	20	18	18-18.3	20
H492-M-12		3-7	6	77	20	18	18-18.3	20
H492-M-13	M20×1.5	6-12	6.5	88	22	20	20-20.3	20
H492-M-14		5-9	6.5	88	22	20	20-20.3	20
H492-M-15		10-14	6.5	98	24	20	20-20.3	20
H492-M-16		7-12	6.5	98	24	20	20-20.3	20
H492-M-17	M22×1.5	10-14	6.5	98	24	22	22-22.3	20
H492-M-18		7-12	6.5	98	24	22	22-22.3	20
H492-M-19	M25×1.5	13-18	7	111	30	25	25-25.3	10
H492-M-20		9-16	7	111	30	25	25-25.3	10

分类

T 总线模块

T 端子台

Y 电气控制

X 连接电缆

H 电气配件

P 开关电源

G 辅材配件

F 气动附件